
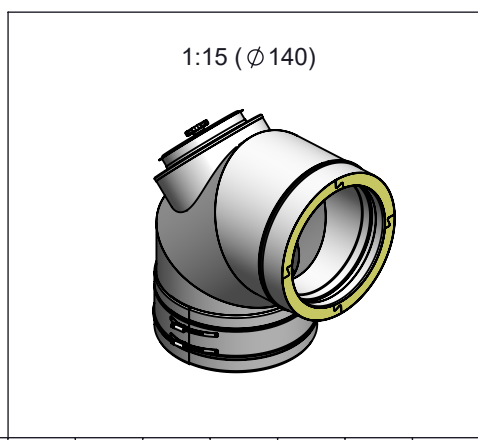
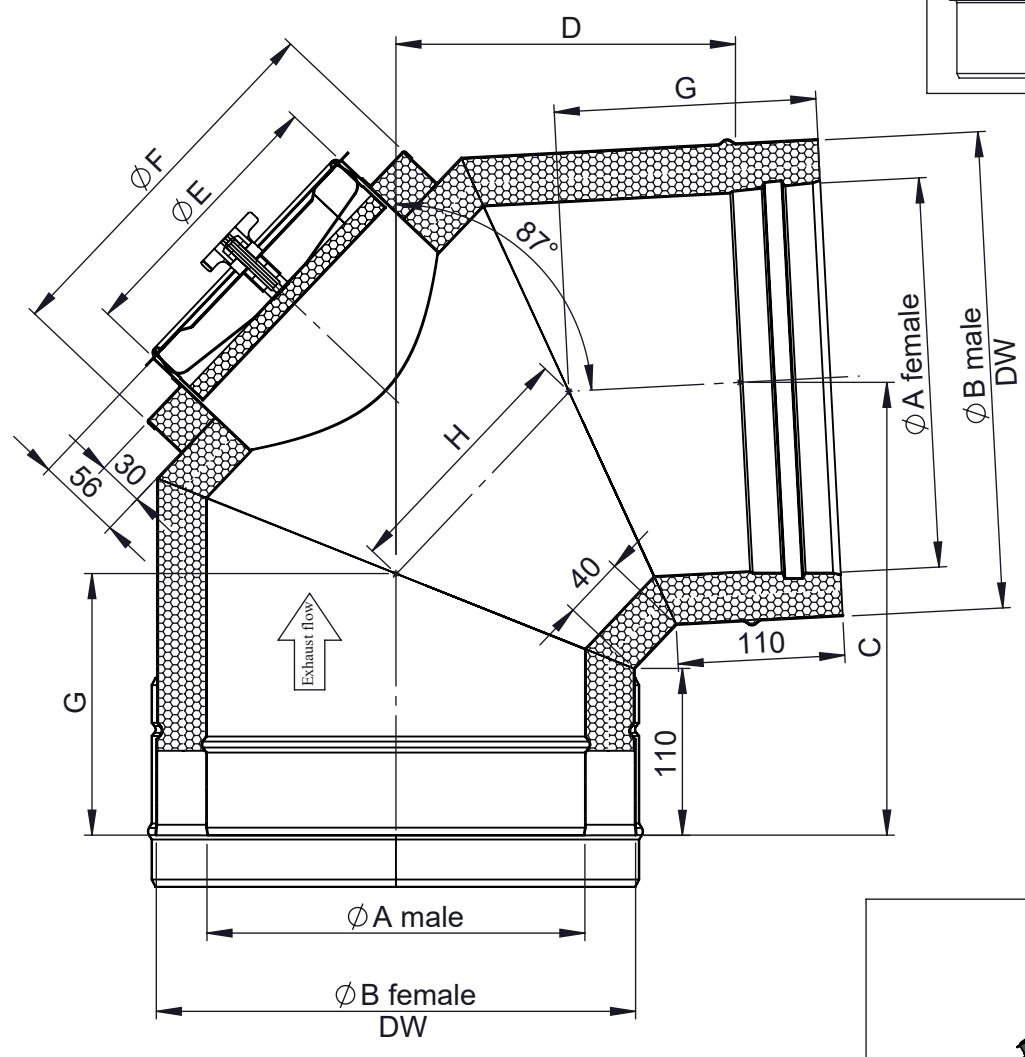


Possible type of female part "FU"

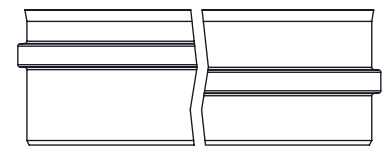

Ø	080	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600					
A	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600					
B	145	165	175	180	185	195	205	215	225	245	265	290	315	365	415	465	515	565	615	665					
C	215	225	230	233	235	240	245	250	255	265	275	288	300	325	350	375	400	425	450	475					
D	151	160	165	168	170	175	179	184	189	198	208	220	232	255	279	303	326	350	374	397					
E	80	100				130				150				180				200				250			
F	145	165				195				215				245				265				315			
G	140	144	146	148	149	151	153	155	157	161	165	170	175	186	196	207	217	227	238	248					
H	101	109	113	115	117	121	125	129	134	142	150	161	171	192	212	233	254	274	295	316					
kg	2,5	3,0	3,3	3,4	3,5	3,9	4,1	4,4	4,8	5,4	6,0	6,9	7,8	9,7	13,0	15,8	18,6	21,5	24,7	28,1					

notes: ENCD	DIN ISO 13920 Tolerances B				<p>CHIMNEY SYSTEMS</p>	scale	
	revisions-no.		mm / kg			1:5	
	date	name		description		format	
	drawn by	28.11.23	KOS			Elbow 87° with inspection opening, round door	A4
	checked by	28.11.23	JAD			code	sheet
	approved by	28.11.23	JWY			DW67G Ø	1 of 1
modified by				drawing-no.			
					02-20-6505-000		