
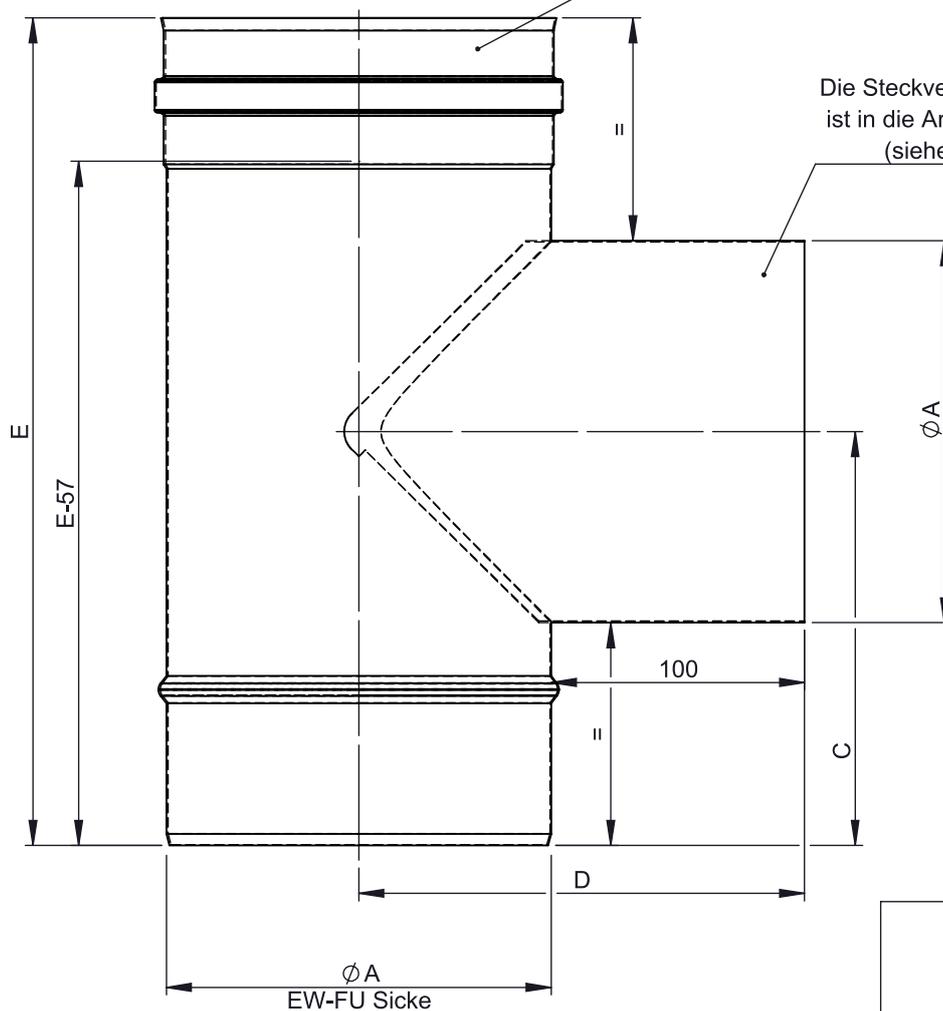


Ausführungsvarianten
für Muffe Innenrohr

EW-FU Muffe

Die Steckverbindung des Abgangs
ist in die Artikelnummer abhängig
(siehe Tabelle "Code")

M1:8 (Ø150)



Code	FU 3317Ø	FU 3317MØ	FU 3317SØ
Variante	 Glatt / Bez końcówki / Without end	 M = Muffe / Mufa / Female EW-FU	 S = Sicke / Zyka / Male EW-FU

Ø	060	080	090	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600					
A	60	80	90	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600					
C	138			165									188		223		248		298		325		350		375		400	
D	130	141	146	151	156	158	161	163	166	171	176	181	191	201	213	226	251	275	300	325	350	375	400					
E	276			329									376		446		496		596		650		700		750		800	
kg	0,4	0,5	0,6	0,7	0,7	0,8	0,8	0,8	0,8	0,9	1	1,1	1,3	1,6	1,8	2,2	3	4,4	4,9	6	7	8,2	9,4					

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A1

mm / kg

scale

1:3

format

A4

sheet

1 of 1



A

B

C

D

E

F