


Ausführungsvarianten
für Muffe Innenrohr



A

B

C

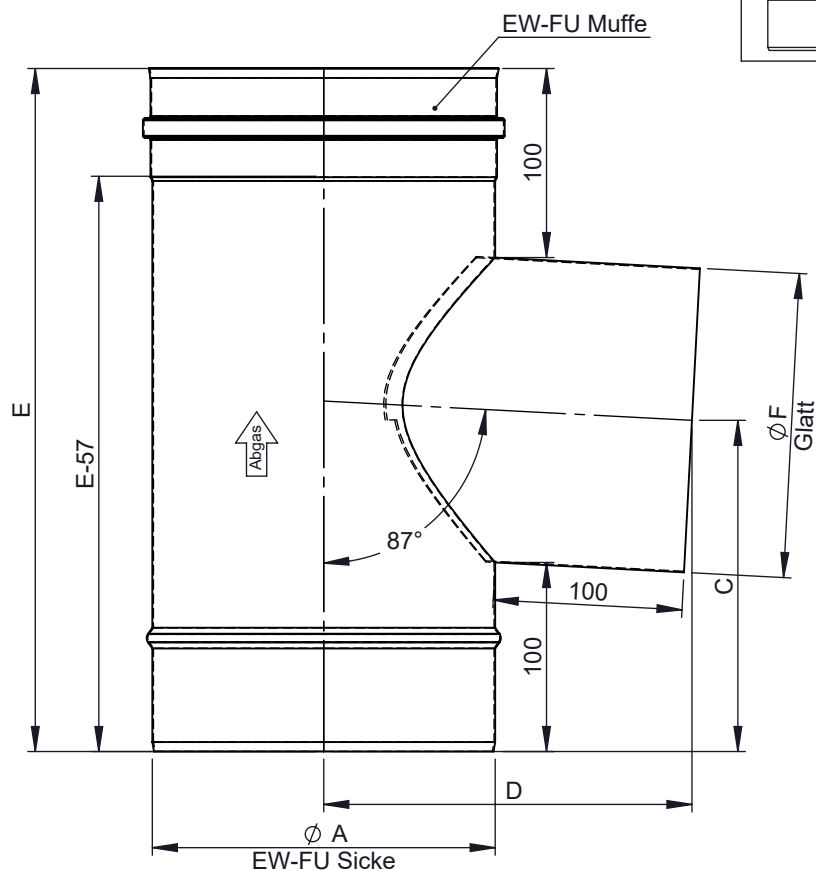

D

M 1:8 (Ø180/160)

Code	FU3015RØ			FU3015RMØ			FU3015RSØ			
Variante										
	Glatt / Bez końcówki / Without end			M = Muffe / Mufa / Female EW-FU			S = Sicke / Zyka / Male EW-FU			

E

Ø	180/60	180/80	180/100	180/110	180/115	180/120	180/125	180/130	180/140	180/150	180/160
A	180										
C	125	135	145	150	153	155	158	160	165	171	175
D	192	193			194			195			
E	260	281	301	311	316	321	326	331	341	352	361
F	60	80	100	110	115	120	125	130	140	150	160
kg	0,82	0,9	0,98	1,02	1,04	1,06	1,08	1,1	1,14	1,18	1,22

F

notes:	DIN ISO 13920 Tolerances B				 Jeremias [®] CHIMNEY SYSTEMS	scale	1:4		
	revisions-no.		A2			mm / kg	format	A4	
	date		09.07.2018			name	description	T-Anschluss 87° Ø180mm (handgeschweißt) mit reduziertem Abgang glatt / FU-Muffe / Sicke	
	drawn by		KAB			code	FU063015R180 / FU063015RM180 / FU063015RS180		
	checked by					drawing-no.			01-01-20-2114-000
	approved by								
modified by		24.03.2022		KSA		sheet	1 of 1		